

# PBR Panel




# PBR Panel

*PBR is ideal for pre-engineered metal, post-frame, and agricultural buildings. Our Galvanized G90 PBR is also ideal for use in buildings for livestock and animal confinement.*

### FEATURES AND BENEFITS

- 36" net panel coverage can be installed over solid substrates or spaced support members.
- Purlin-bearing leg speeds installation and improves the quality of panel side laps providing a consistent weather-resistant joint.
- Provides traditional metal roof or wall appearance with 1¼" high trapezoidal major ribs at 12" on center with minor ribs between each major rib.
- Trim packages available in the same gauge and color as the roof and wall panel.
- PBR panel can be installed on pitches as low as 1:12 with field applied mastic.
- Polycarbonate Skylight panels are available in matching profile, inquire for slopes less than 1:12.

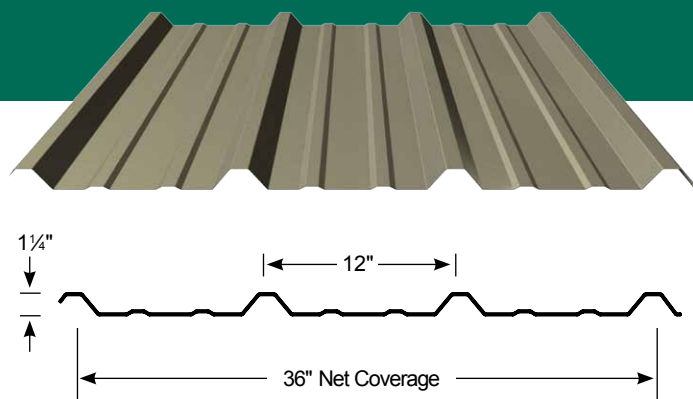

### PANEL OVERVIEW

- Available in 8 Dura Tech™ nt colors and ZINCALUME® Plus.
- ZINCALUME coated substrate, per ASTM A792, is standard and backed by a limited corrosion warranty on painted or unpainted panels. It is not recommended for use in structures where exposure to animals and/or animal waste will occur.
- Galvanized G90 coated substrate, per ASTM653, is ideal for animal confinement and is available in Galvanized G90 Plus and Winter White only.

## Cool DURA TECH *nt*



**REPRESENTATION OF COLORS MAY VARY DUE TO PRINTING LIMITATIONS.** Sample color chips are available upon request. Consult your ASC Building Products representative for more information.

The **Dura Tech™ nt** system combines the protection of ZINCALUME® with a highly durable **COOL** Resin technology to reduce the demand for energy and provide excellent color retention.

### PAINT FINISH NOTES

All PBR panels are available in our 8 standard, 26 gauge, Dura Tech *nt* colors, as well as ZINCALUME Plus and Galvanized G90 Plus. Inquire with a sales representative for lead times and more information.

### AVAILABILITY

PBR is available out of Sacramento, CA and Spokane, WA. Additional lead times apply on products supplied from a non-local facility.

### FLASHINGS & TRIM

All trims and flashings are offered in our 8 standard, 26 gauge, Dura Tech *nt* colors, as well as ZINCALUME Plus and Galvanized G90 Plus. Inquire with a sales representative for more information.

### OIL CANNING

All flat metal surfaces can display waviness commonly referred to as "oil canning". "Oil canning" is an inherent characteristic of steel products, not a defect, and therefore is not a cause for panel rejection.

### LOAD TABLE (Please see technical product sheets online at [www.ascbp.com](http://www.ascbp.com) for section properties and technical data)

Gauge	Span	Cond.	Allowable Inward Loads (lbs/ft <sup>2</sup> ) per Span (ft.-in.)										
			3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"
26	Single Span	f	100	74	56	45	36	30	25	21	18	16	14
		L/180	-	-	-	40	29	22	17	13	11	9	7
	Double Span	f	122	89	68	54	44	36	30	26	22	19	17
		L/180	-	-	-	-	-	-	-	-	-	-	17
	Triple Span	f	152	112	86	68	55	45	38	32	28	24	21
		L/180	-	-	-	-	-	-	37	29	23	19	16

**LOADING TABLE LEGEND**  
 f - Load limited by flexural bending stress  
 L - Span (Inches)  
 L/180 - Load limited by a deflection of 1/180 of the span  
 w - Distributed load

- NOTES:**
- Top values based on allowable stress. Bottom values based on allowable deflection of L/180.
  - "-" denotes that the allowable load is limited by the allowable flexural bending stress.
  - Steel conforms to ASTM A653 (Galvanized) or ASTM A792 (ZINCALUME) structural steel.
  - Tabulated values are for positive (Inward) loading only.
  - Values are based on the American Iron and Steel Institute (AISI) "Cold Formed Steel Design Manual" (2007 Edition).
- Specifications subject to change without notice.

**ASC Building Products' Roofing and Siding is the Building Choice You Can Make with Confidence.**

### Five lasting advantages of steel . . .

- Outstanding Value
- Reduced Energy Costs
- Long-Term Protection
- Non-Combustible
- Low Maintenance

ASC Building Products is Proudly Distributed by:

