



~Limited~
Lifetime
Warranty
DURA TECH xl


Nor-Clad

**STANDING BY OUR PRODUCTS
AND WARRANTIES FOR 40 YEARS**

Nor-Clad panel is a light gauge, exposed fastener panel with 36" coverage used in residential roof and wall applications.

FEATURES AND BENEFITS

- Available in our Dura Tech™ xl paint system or our ZINCALUME® Plus finish for unpainted applications; limited lifetime warranty available on residential applications.
- ColorGuard 25 with Spectrascape® available with a 25 year limited warranty for your agricultural, post frame and recreational building applications.
- Specialty prints available in 29ga as a standard offer.
- Offered as a Liner Panel in a economical polyester paint system. Available in Light Stone and Winter White.
- Weather-resistant lap system with anti-siphon groove provides better weathertightness compared to most other light gauge, exposed fastener panels.
- Available in durable polycarbonate skylight panels.
- Economical standard and custom trim packages available with every order.
- Product is UL Class A Fire Rated when installed in accordance with UL requirements.



Cool DURA TECH XL

COOL Dura Tech xl keeps the heat out and the color brilliant.

- Superior color retention and resistance to chalk and fade.
- Dura Tech xl energy saving **COOL** colors reduce the demand for energy.



COLORGUARD 25 with Spectrascape

A robust and economical paint system.

- Resistant to chalk and fade with ratings similar to a PVDF.
- Engineered to resist peeling or cracking for 25 years.



Product Availability by Gauge and Location

Location	Anchorage Alaska	Spokane Washington	Salem Oregon
Dura Tech xl	29ga	29ga	29ga & 26ga
ColorGuard 25	29ga	29ga	29ga

Additional lead times apply on products supplied from a non-local facility.

+ ColorGuard 25 Light Stone 29ga available in Salem, OR.

¹ Not available in Anchorage, AK.

Premium Colors (The premium colors below are subject to upcharge)



† Please note these colors are batch sensitive (may have color variation) and are directional in nature. Different batches are not to be mixed on projects. We recommend that you request a sample of current stocked material to review actual color before ordering to ensure color accuracy. We are not responsible for color variations.


Not all facilities produce product in premium colors. Please allow additional lead time for shipment to other service areas.

REPRESENTATION OF COLORS MAY VARY DUE TO PRINTING LIMITATIONS.

Sample color chips are available upon request. Consult your ASC Building Products representative for more information.

LOAD TABLE (Please see technical product sheets online at www.ascbp.com for section properties and technical data)

Gauge	Span	Cond.	Positive (Inward) Uniform Load Capacity (lbs/ft²) / Span (ft. - in.)								
			16"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	6'-0"
29	Single Span	ASD, W/Ω	199	88	56	39	29	22	17	14	10
		L/180	-	87	45	26	16	11	8	6	3
	Double Span	ASD, W/Ω	196	88	57	39	28	22	17	13	9
		L/180	-	-	-	-	-	-	-	-	8
	Triple Span	ASD, W/Ω	243	110	70	49	36	27	21	18	12
		L/180	-	-	-	49	31	21	14	11	6
26	Single Span	ASD, W/Ω	264	117	75	52	38	29	23	19	13
		L/180	-	109	56	32	20	14	10	7	4
	Double Span	ASD, W/Ω	248	111	71	50	36	28	22	17	12
		L/180	-	-	-	-	-	-	-	17	10
	Triple Span	ASD, W/Ω	307	138	89	61	45	34	27	22	15
		L/180	-	-	-	61	38	26	18	13	8

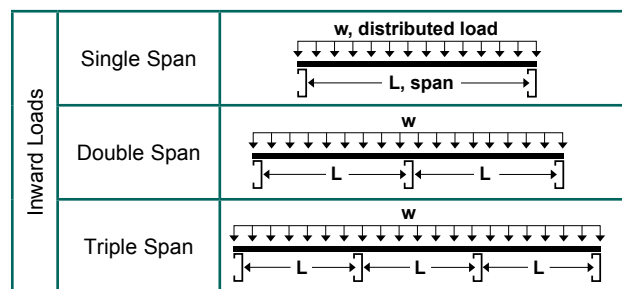

ASC Building Products is Proudly Distributed by:

NOTES: Specifications subject to change without notice.

- Top values based on allowable stress (ASD). Bottom values based on a deflection limit of L/180.
- "-" denotes that the allowable load is limited by the panel stress vs. deflection limit.
- Steel conforms to ASTM A653 (Galvanized) or ASTM A792 (ZINCALUME) structural steel.
- Tabulated values are for positive (inward) uniform loading only.
- Values are based on the American Iron and Steel Institute "Cold Formed Steel Design Manual" (AISI S100-12).

Refer to www.ascbp.com for more complete Nor-Clad performance data.